



(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11)

EP 1 130 536 A2

EUROPEAN PATENT APPLICATION

(12)

(43) Date of publication:
05.09.2001 Bulletin 2001/36

(51) Int Cl.7: G06K 9/22, G07C 9/00,
G06K 9/00

(21) Application number: 01200370.3

(22) Date of filing: 13.12.1995

(84) Designated Contracting States:
DE FR GB

(30) Priority: 16.12.1994 US 357810

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
95309089.1 / 0 717 367

(71) Applicant: HYUNDAI ELECTRONICS AMERICA
Milpitas, California 95035 (US)

(72) Inventor: Skoog, Steven K.
Colorado Springs, CO 80917 (US)

(74) Representative: Gill, David Alan
W.P. Thompson & Co.,
Celcon House,
289-293 High Holborn
London WC1V 7HU (GB)

Remarks:


This application was filed on 02 - 02 - 2001 as a
divisional application to the application mentioned
under INID code 62.

(54) Digitizer stylus apparatus and method

(57) The present invention provides for a stylus (6)
for use with a digitizing tablet (3). The stylus is arranged
to store information which identifies characteristics of a

user's handwriting and these characteristics are trans-
mitted to a computer (2) when the user interfaces with
the computer (2), and can then be used by the computer
to recognize the user's handwriting.

FIG. 11

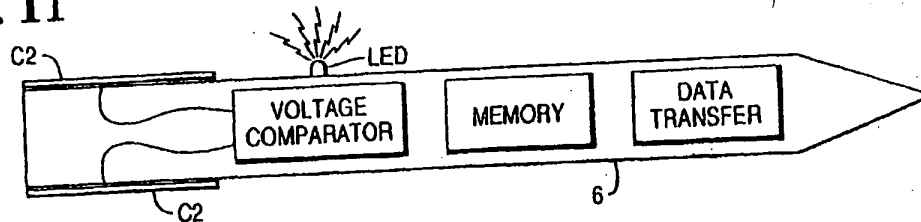

EP 1 130 536 A2

Description

[0001] The present invention relates to digitizer stylus apparatus and method.

[0002] In particular, the present invention is related to the subject matter of EP-A-0 717 368.

[0003] According to one aspect of the present invention there is provided stylus apparatus for providing an electrical data signal and characterized by memory means for storing data which can be used to interpret scribed indicia.

[0004] According to another aspect of the present invention there is provided scribed indicia verification apparatus characterized by means for parameterizing a signature, and means for loading the parameterized signature into stylus apparatus as claimed in any one of Claims 1 to 4.

[0005] According to a further aspect of the present invention there is provided a method of loading data into stylus apparatus which produces a position signal for use by a digitizing tablet, characterised by the steps of generating digitized data, based on indicia written by the stylus, and loading the digitized data into the stylus.

[0006] According to yet another aspect of the present invention there is provided a method of verifying the signature of a user of a communication device, characterized by the steps of transmitting reference data, which describes the user's signature, to the communication device from a stylus held by the user, deriving sample data from a signature written by the user, and comparing the reference data with the sample data.

[0007] The invention is advantageous in providing improved signature recognition apparatus.

[0008] Also, the invention can provide a stylus, for use with a digitizing tablet, which contains data which describes its owner's signature.

[0009] The invention can also provide for a stylus for use with a digitizing tablet. The stylus is arranged to store information which identifies characteristics of a user's handwriting and these characteristics are transmitted to a computer when the user interfaces with the computer, and can then be used by the computer to recognize the user's handwriting.

[0010] Further, the invention can also provide for a system which detects the position of a stylus on a tablet, the improvement comprising the step of transmitting stored data, indicative of characteristics of human's handwriting, from the stylus.

[0011] In one form of the invention, a stylus contains memory which stores data which describes the signature of the owner of the stylus.

[0012] In another form of the invention, the description of the signature, contained in the stylus, is compared with a signature actually written by the user. If they match, the identity of the user is confirmed.

[0013] The invention therefore concerns a stylus for use with a digitizing tablet. The stylus stores information regarding the characteristics of a user's handwriting, in digital format.

[0014] When the user seeks to interface with a computer, the stylus downloads the characteristics to the computer. The computer then uses the characteristics to recognize, or interpret, the user's handwriting.

[0015] The invention is described further hereinafter, by way of example only, with reference to the accompanying drawings in which:

Fig. 1 illustrates a digitizing tablet 3 associated with a computer 4;

Fig. 2 is a simplified view of a digitizing tablet;

Fig. 3 illustrates a signal 9 produced by a stylus, and currents I1, I2, I3, and I4 induced by the signal;

Figs. 4 and 5 illustrate in more detail how the currents are produced;

Fig. 6 illustrates paths followed by the currents;

Fig. 7 illustrates a signature;

Fig. 8 illustrates digitizing a signature;

Fig. 9 illustrates a stylus 6 which contains a memory which holds data indicative of a reference signature;

Fig. 10 illustrates a public data terminal, such as an advanced public telephone, having an associated digitizer pad, and also a power cable containing contacts which connect with contacts carried by a stylus 6;

Fig. 11 illustrates a stylus lacking batteries or other power source, which receives electrical power through particular contacts;

Fig. 12 is a flow chart illustrating one signature verification procedure; and

Fig. 13 is a flow chart illustrating the loading of reference signature data into a stylus.

[0016] Fig. 1 illustrates a computer 4 and a digitizing tablet 3 which provides an input mechanism to the computer. The digitizing tablet need not be a separate element, as shown in Fig. 1, but can take the form of a transparent overlay of the display 2. Such an overlay configuration is frequently used in pen-based portable computers.

[0017] The tablet-and-stylus combination provide input to the computer and a simplified explanation of the operation such a tablet-and-stylus is given below.

[0018] Fig. 2 shows a digitizing tablet 3 and its associated stylus 6. In the tablet, there are four-current-to-voltage

amplifiers (labeled I-to-V). One such amplifier is provided at each corner. The stylus 6, when activated, produces a signal 9 (see Fig. 3). This signal induces currents I1, I2, I3, and I4, which are detected by the I-to-V amplifiers.

[0019] The I-to-V amplifiers each produce a voltage (V) indicative of the size of its respective current (I). Processing circuitry, not shown, but known in the art, receives the voltage signals, and computes the position of the stylus 6.

[0020] The currents I1 - I4 are induced because the stylus 6 acts as one plate of a capacitor. The digitizing tablet provides the other plate of the capacitor. The tablet can include a resistive surface, or grid, of a material such as indium tin oxide, which acts as the other plate of the capacitor.

[0021] As Fig. 4 indicates, when a negative charge is applied to a tip 2 of the stylus 6, a positive charge is induced on the surface of the tablet 3. Currents I1-I4 supply this positive charge. Conversely, as in Figure 5, a positive charge on the tip 2 of the stylus 6 induces a negative charge on the tablet. The currents I1 - I4 supply this negative charge.

[0022] As Fig. 6 shows, each current can be viewed as following a direct path from the stylus to one corner of the tablet. The following reasoning allows stylus position to be inferred from the voltage signals:

1. The length of each path determines the resistance of the path.
2. The resistance determines the size of the current.
3. The size of the current determines the voltage produced by the amplifier.
4. Each voltage indicates its respective path length.

[0023] A highly simplified example, as outlined below, provides for further illustration.

[0024] Assume that the stylus in Fig. 6 represents a voltage source applied to the tablet. The paths have the relative lengths shown in Fig. 6, and also listed in the following Table.

TABLE

| PATH | RELATIVE LENGTH | RELATIVE RESISTANCE | RELATIVE CURRENT | RELATIVE I-to-V VOLTAGE |
|------|-----------------|---------------------|------------------|-------------------------|
| AA | 0.66 | 0.66 | 1.52 | 1.52 |
| BB | 1.00 | 1.00 | 1.00 | 1.00 |
| CC | 0.93 | 0.93 | 1.08 | 1.08 |
| DD | 0.55 | 0.55 | 1.82 | 1.82 |

[0025] The resistance of the path depends on the length, so that the relative resistances are in proportion to the relative path lengths, as indicated in the Table's columns RELATIVE LENGTH and RELATIVE RESISTANCE.

[0026] Current equals voltage divided by resistance, V/R , so that the relative currents will be inversely proportional to the relative path lengths, as indicated in the Table's column RELATIVE CURRENT.

[0027] The I-to-V amplifiers in Figure 2 each produce a voltage which is proportional to its respective current. Thus, the voltage outputs of the I-to-V amplifiers have the relative magnitudes indicated in the rightmost column of the Table.

[0028] The output voltage signals can be used to compute position of the stylus.

[0029] The system described above can be used to recognize a user's signature. Fig. 7 shows the stylus 6 writing a signature on the digitizer tablet 3. The position of the stylus 6 is detected periodically, such as every 1/100 second, or other suitable interval. Data points, indicated by the crosses in Fig. 8, are derived at these intervals.

[0030] For each data point, the x- and y-position are known, together with the real-time occurrence of the data point. Consequently, velocities, accelerations, and other parameters, in addition to the x- and y-positions, can be derived.

[0031] Each person's signature is represented by a unique collection of these parameters. Thus, these parameters, like fingerprints, can be used to identify a person.

[0032] Some styluses are not physically connected, or tethered, to the computer by the power cord P shown in Fig. 1 and can, instead, be battery-powered.

[0033] One form of the invention can conceptually be divided into two parts. First, a user writes a signature on a digitizing tablet, using a special stylus, and the tablet digitizes or otherwise parameterizes the signature. This signature may be called a sample signature.

[0034] Second, the special stylus contains a pre-recorded, digitized image of the user's signature, which may be called a reference signature. The stylus transmits the reference signature to the digitizing tablet, which compares the sample signature with the reference signature. If they match, the user is assumed to be the actual owner of the stylus.

[0035] Appropriate reference signature data can be loaded into the memory of the stylus 6 in Fig. 9 in numerous different ways. A simplified explanation comprises the following procedure:

- (1) the user writes the reference signature onto a digitizing tablet, which digitizes the data, in the usual manner.

The digitizing process creates a table of reference data, which describes the reference signature;
 (2) the table is burned into a PROM, EPROM, EEPROM, or other memory chip; and
 (3) the chip is installed into the stylus, producing a device such as that shown in Fig. 9.

5 [0036] Another approach eliminates the need to install a memory chip into the stylus, and is illustrated by the flow chart of Fig. 13. A user writes a signature onto a digitizing tablet (as in Fig. 7) and reference signature data is derived from the written signature, in a known manner.

[0037] This reference data is then loaded into a memory within the stylus (illustrated in Fig. 9), using wireless telemetry outlined further below.

10 [0038] There are several formats for digitizing signature data. Perhaps the simplest is a bit map of the signature. According to this feature, the collection of points in Fig. 7 comprises a bit-map of the signature.

[0039] Two other formats are illustrated in US patents 5,285,506, Crooks et al. and 5,054,088, Gunderson et al.

[0040] The particular format used in digitizing the signature is not necessarily significant.

[0041] It is preferred that the data transfer between the stylus and the digitizing tablet be accomplished by wireless

15 telemetry.
 [0042] Examples of data transfer between a stylus and a digitizing tablet can be found in US patents 4,672,154, Rodgers, et al., 5,247,138, Landmeier, 5,294,792, Lewis, et al., and 5,247,137, Epperson.

[0043] In addition, published European patent application EP-A-0 669 595 provides further information relating to such features.

20 [0044] The telemetry can be radio-frequency, optical, acoustic, or any other type and numerous approaches, known in the art, exist for the transfer of data between a computer and a remote component.

[0045] As an alternative to wireless telemetry, a removable, hard-wired connection can be made between the stylus and a digitizing device. For example, the stylus can contain metallic contacts which mate with a receiver, as shown in Fig. 10. The hard-wired approach can be useful in situations where it is desired to deliver electrical power to the stylus, as for charging a battery, or for allowing the stylus to consume larger amounts of power than are feasible to provide

25 via battery.
 [0046] It should be appreciated that the signature need not be the actual, legal signature of the user. The signature can be any graphical image which the user draws. It can be a word, or a picture, and can be described generically as an "image."

30 [0047] Also, the time of transfer of the reference data, relative to the time of writing the signature, is not necessarily significant. For example, the transfer of reference data can be done prior to the writing of the sample signature, or afterwards.

[0048] Also, the reference data can be transferred during writing of the signature. That is, a multiplexing between position data and signature transfer data can be undertaken.

35 [0049] Further, the transfer of the reference signature data can be accomplished by a second data channel, independent of the position signal 9 shown in Fig. 3. Such a channel is known from the above mentioned European patent application EP-A-0 669 595. As will be appreciated, such features relate particularly to pen-based computers, wherein a pen, or stylus is positioned on a display of the computer, which display includes a digitizer tablet, and which produces a signal that allows the computer to detect the position of the stylus. The stylus is also arranged to produce a second

40 signal, which is used as a telemetry carrier to transmit data from the stylus to the computer. The stylus is provided with position signal generating means such as a first oscillator, and a data signal generating means such as a second oscillator, so that a data signal can be delivered from the stylus at the same time as the position signal. A digitizer tablet is also provided with filter means for discriminating between the two aforementioned signals.

[0050] From one perspective, there are two computation tasks involved:

- 45
- (1) producing sample data from the sample signature, and
 - (2) comparing the sample data with the reference data.

50 [0051] How these tasks are allocated between devices is not necessarily significant. For example, the digitizing tablet may contain a processor which produces the sample data described in task (1). However, a computer may perform the comparison described in task (2).

[0052] It should be observed that the reference data stored within the stylus is not mere intangible information. For example, data stored in a PROM can take the form of fuse representation, which is either blown or intact. A blown fuse indicates a ZERO, and an intact fuse indicates a ONE (or vice-versa). Similar observations apply to EPROMS and

55 EEPROMS.

[0053] Thus, even though the reference signature data comprises indicia of the reference signature, the reference signature data is nevertheless a tangible entity.

[0054] Power consumption in styluses used with digitizing tablets is an important issue. Batteries used to power the

styluses occupy space, and must be replaced or recharged periodically.

[0055] It may be desirable to construct a stylus which contains no batteries at all, and which draws all of its power from an external, stationary source. Figs. 10 and 11 provide such an example.

[0056] In Fig. 10, a user attaches the stylus 6 to a power cord PC, which provides power to the stylus 6. A voltage comparator in Fig. 11 can be employed to test whether correct voltage is being delivered, and lights an LED when the correct voltage is received.

[0057] With this arrangement, the stylus can produce a higher-power signal 9 in Fig. 3, without concern over battery depletion. In addition, the power cord PC can contain a channel for downloading of the reference signature data, in order to eliminate telemetry.

[0058] The present invention can also allow local identification of a user, without the requirement of added telecommunication. An example of identification, in which telecommunication is required, is outlined further below.

[0059] When a user enters a card into a bank's Automated Teller Machine (ATM), the ATM asks the user for a password. Meanwhile, the ATM links, by telephone generally, to a central computer, and finds out the user's password. The ATM then compares the password which the user entered with the password received from the central computer. This telecommunication takes time, adds cost, and is subject to failure under certain conditions, such as thunderstorms or other interference.

[0060] The invention is advantageous in eliminating the requirement of contacting a possible remote central computer. Fig. 12 describes a sequence of steps of identification of a user, without resort to telecommunication.

[0061] The following examples illustrate situations in which identification of a user can be made by signature. However, the list provided should not be considered exhaustive.

- a) Admission of a user to restricted locations;
- b) granting of access to a user to computer installations; and
- c) granting access to ATMs.

[0062] The data stored in the stylus need not be limited to data which can be used to identify the user's signature. Rather, the data can be the type used to interpret the user's handwriting generally.

[0063] For example, the sample written by the user, as indicated in Fig. 7, may be required to contain a sufficient number of symbols to characterize the user's handwriting, for purposes of allowing a computer to later read the user's handwriting.

[0064] The system derives the necessary handwriting characteristics from the sample, according to the method of handwriting recognition used by the system. Such handwriting characterization is known in the art. The system then loads these characteristics into memory contained in the stylus, in a manner similar to loading the reference signature data.

[0065] Later, when the user interfaces with a computer, using the stylus, the stylus transmits the user's handwriting characteristics to the computer, in the manner described above. The computer uses these characteristics to interpret the user's handwriting.

[0066] A very simple example, which illustrates some of the underlying principles, is outlined below. The sample which the user writes may contain every letter of the alphabet, both upper and lower case, plus the ten numerals. The system digitizes each character, as described in connection with Fig. 7. The system can now contain a digitized sample representing each letter and number of the user's handwriting.

[0067] These digitized samples are stored within the stylus. When the user wishes to interface with a computer, the stylus downloads the digitized samples to the computer. When the user writes handwriting on the digitizing tablet, the computer compares each letter with the digitized samples, and selects the best match, thereby interpreting the handwriting.

[0068] Of course, advanced handwriting systems do not perform this comparison of digitized characters. Instead, they characterize the user's handwriting in other ways, but the basic idea is still the same: obtain unique characteristics of the user's handwriting (i.e., "learn" the user's handwriting), and then interpret the user's handwriting, based on these characteristics.

[0069] Of course, the data indicative of the user's handwriting characteristics can be loaded into the stylus in other ways, and the particular method of loading is not necessarily significant. Thus, one important aspect of the invention is the storage, no matter how achieved, within the stylus, of data which is used to recognize a user's handwriting.

[0070] The invention is not restricted to the details of the foregoing embodiments and numerous substitutions and modifications can be undertaken without departing from the scope of the invention.

Claims

1. A user verification system comprising:

an electronic stylus;
a digitizing tablet adapted to receive handwriting information from said electronic stylus;
a receiver located remotely from said electronic stylus to receive verification data about the user via a telemetry
signal from the electronic stylus;
a memory coupled to the receiver to store the verification data of the user;
a transmitter disposed in said electronic stylus to transmit said verification data of the user so as to verify a
signature of said user;
a memory to store sample handwriting information input by said user utilizing the electronic stylus and the
digitizing tablet so that said sample handwriting information can be used to verify the signature of the user;
a comparator to compare said sample handwriting information input by said user with said verification data of
the user so as to verify that said sample handwriting information is authentic; and
wherein said transmitter disposed in said electronic stylus is operable to transmit said verification data to said
receiver without the use of a physical connection between said transmitter and said receiver.

2. The system as recited in claim 1, further comprising a power source for delivery of power to the electronic stylus.

3. The system as recited in claim 2, wherein said power source comprises a power cord connectable to the electronic stylus.

4. The system as recited in claim 1, wherein the electronic stylus comprises components requiring power and wherein the electronic stylus is remote from the power source that powers components of the electronic stylus.

5. The verification system of claim 1, wherein said verification data is comprised of data elements representing the signature of the user.

6. The verification system of claim 1, wherein said verification data comprises data elements representing a personal-identification-number of a user.

7. A user verification method comprising:

providing an electronic stylus;
providing a digitizing tablet adapted to receive handwriting information from said electronic stylus;
providing a receiver located remotely from said electronic stylus to receive verification data about the user via
a telemetry signal from the electronic stylus;
providing a memory coupled to the receiver to store the verification data of the user;
providing a transmitter disposed in said electronic stylus to transmit said verification data of the user so as to
verify a signature of said user;
providing a memory to store sample handwriting information input by said user utilizing the electronic stylus
and the digitizing tablet so that said sample handwriting information can be used to verify the signature of the
user;
providing a comparator to compare said sample handwriting information input by said user with said verification
data of the user so as to verify that said sample handwriting information is authentic; and
disposing said transmitter in said electronic stylus so as to be operable to transmit said verification data to
said receiver without the use of a physical connection between said transmitter and said receiver.

8. The method as described in claim 7, further comprising:
providing a power source for delivery of power to the electronic stylus.

9. The method as described in claim 8 and further comprising:
coupling said power source to said electronic stylus via a power cord.

10. The method as described in claim 7 and further comprising:
formatting said verification data as data elements representative of the signature of the user.

11. The method as described in claim 7 and further comprising:
formatting said verification data as data elements representative of a personal-identification-number of the user.

12. A method for use in a user verification system, said user verification system comprising:

a digitizing tablet adapted to receive handwriting information from an electronic stylus;
a receiver located remotely from said electronic stylus to receive verification data about a user via a telemetry
signal from the electronic stylus;
a memory coupled to the receiver to store the verification data; and
a comparator operable to compare sample handwriting information input by said user with said verification
data of the user so as to verify that said sample handwriting information is authentic; said method comprising:

providing said electronic stylus;
providing a transmitter disposed in said electronic stylus, said transmitter operable to transmit said veri-
fication data of the user to said receiver so as to verify a signature of said user;
disposing said transmitter in said electronic stylus so as to be operable to transmit said verification data
to said receiver without the use of a physical connection between said transmitter and said receiver.

13. The method as described in claim 12, further comprising:
providing a power source for delivery of power to the electronic stylus.

14. The method as described in claim 13 and further comprising:
coupling said power source to said electronic stylus via a power cord.

15. The method as described in claim 12 and further comprising:
formatting said verification data as data elements representative of the signature of the user.

16. The method as described in claim 12 and further comprising:
formatting said verification data as data elements representative of a personal-identification-number of the user.

17. A method for use in a user verification system said user verification system comprising:

an electronic stylus;
a transmitter disposed in said electronic stylus to transmit verification data about a user so as to verify a
signature of said user;
wherein said transmitter is disposed in said electronic stylus so as to be operable to transmit said verification
data to a receiver without the use of a physical connection between said transmitter and said receiver;
said method comprising:

providing a digitizing tablet adapted to receive handwriting information from said electronic stylus;
providing said receiver located remotely from said electronic stylus to receive said verification data about
the user via a telemetry signal from said electronic stylus;
providing a memory coupled to said receiver to store said verification data;
providing a memory to store sample handwriting information input by said user utilizing said electronic
stylus and said digitizing tablet so that said sample handwriting information can be used to verify the
signature of the user; and
providing a comparator to compare said sample handwriting information input by the user with said veri-
fication data so as to verify that said sample handwriting information is authentic.

18. The method as described in claim 17 and further comprising:
formatting said verification data as data elements representative of the signature of the user.

19. The method as described in claim 17 and further comprising:
formatting said verification data as data elements representative of a personal-identification-number of the user.

20. An apparatus for use in a user verification system, said user verification system comprising:

a digitizing tablet adapted to receive handwriting information from an electronic stylus;

a receiver located remotely from said electronic stylus to receive verification data about a user via a telemetry signal from the electronic stylus;
a memory coupled to the receiver to store the verification data; and
a comparator operable to compare sample handwriting information input by said user with said verification data of the user so as to verify that said sample handwriting information is authentic; said apparatus comprising:

an electronic stylus;
a transmitter disposed in said electronic stylus, said transmitter operable to transmit said verification data of the user to said receiver so as to verify a signature of said user;
wherein said transmitter is disposed in said electronic stylus so as to be operable to transmit said verification data to said receiver without the use of a physical connection between said transmitter and said receiver.

21. The apparatus as described in claim 20 and further comprising:
a power source for delivery of power to the electronic stylus.

22. The apparatus as described in claim 21 wherein said power source is coupled to said electronic stylus via a power cord.

23. The apparatus as described in claim 20 wherein said verification data is formatted as data elements representative of the signature of the user.

24. The apparatus as described in claim 21 wherein said verification data is formatted as data elements representative of a personal-identification-number of the user.

25. An apparatus for use in a user verification system said user verification system comprising:

an electronic stylus;
a transmitter disposed in said electronic stylus to transmit verification data about a user so as to verify a signature of said user;
wherein said transmitter is disposed in said electronic stylus so as to be operable to transmit said verification data to a receiver without the use of a physical connection between said transmitter and said receiver;
said apparatus comprising:

a digitizing tablet adapted to receive handwriting information from said electronic stylus;
a receiver located remotely from said electronic stylus to receive said verification data about the user via a telemetry signal from said electronic stylus;
a memory coupled to said receiver to store said verification data;
a memory to store sample handwriting information input by said user utilizing said electronic stylus and said digitizing tablet so that said sample handwriting information can be used to verify the signature of the user; and
a comparator to compare said sample handwriting information input by the user with said verification data so as to verify that said sample handwriting information is authentic.

26. The apparatus as described in claim 25 wherein said verification data is formatted as data elements representative of the signature of the user.

27. The apparatus as described in claim 25 wherein said verification data is formatted as data elements representative of a personal-identification-number of the user.

FIG. 1

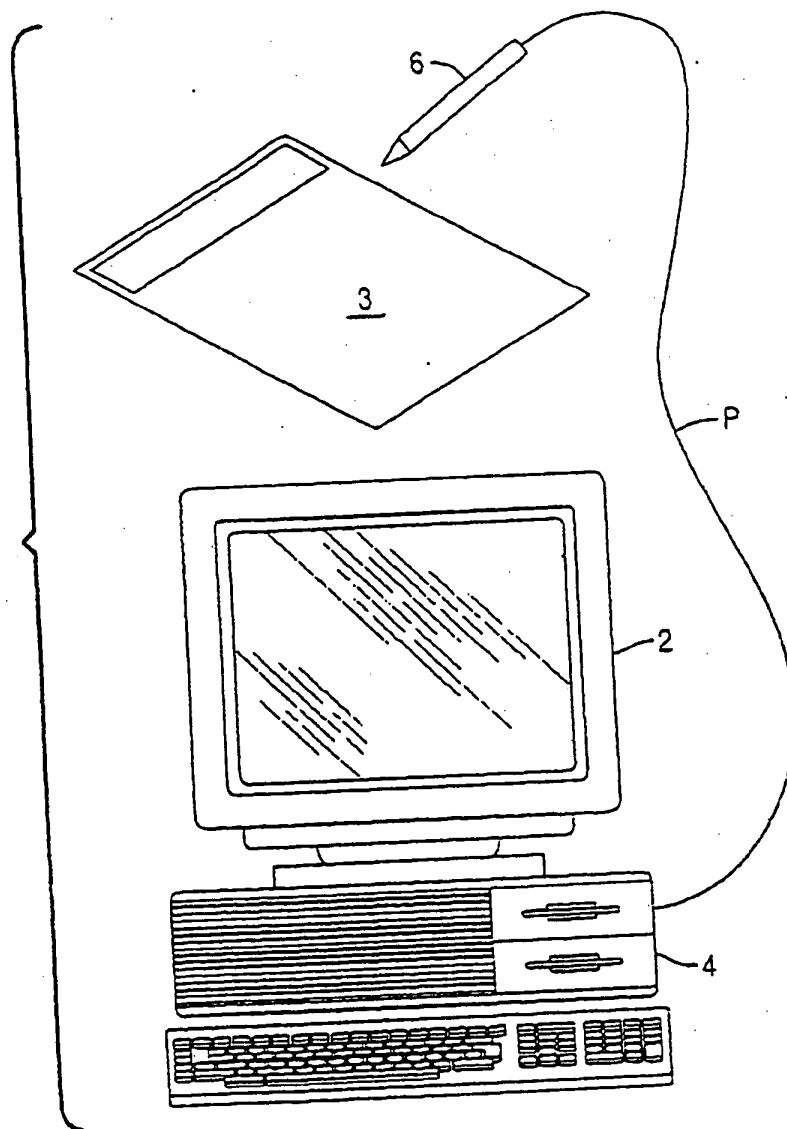


FIG. 2

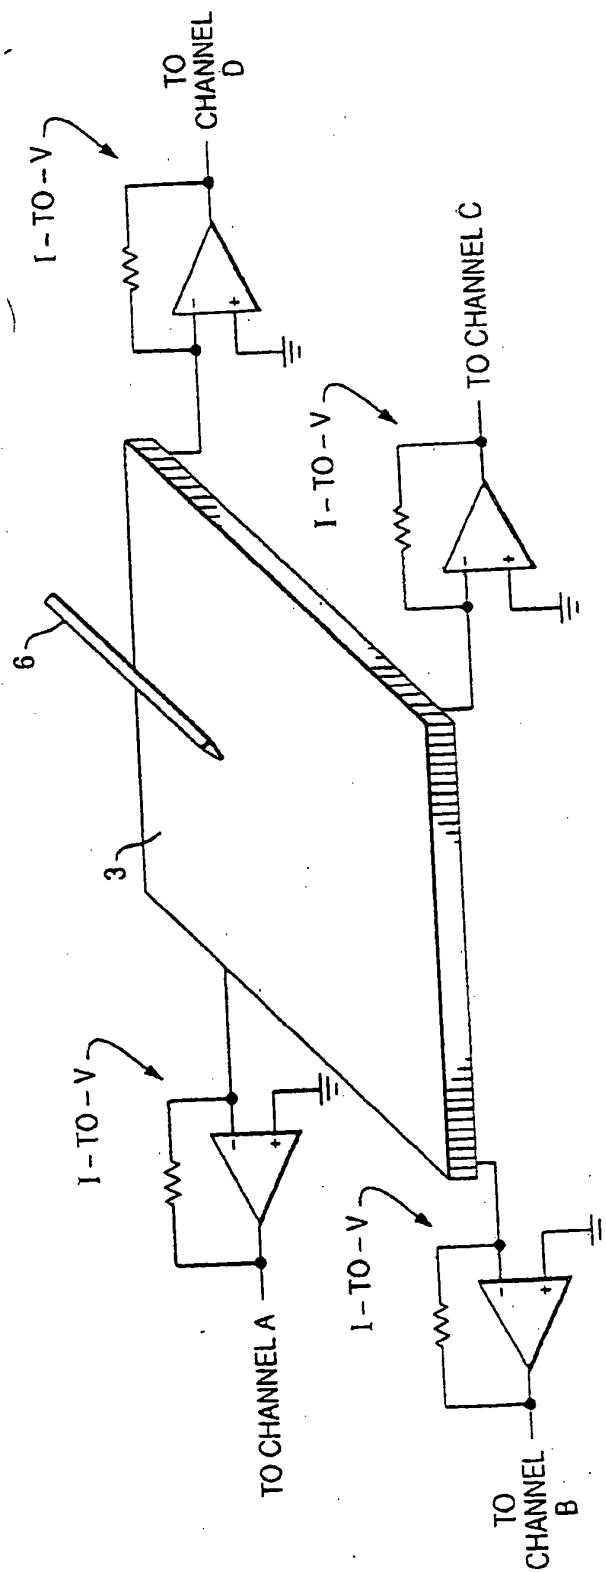


FIG. 3

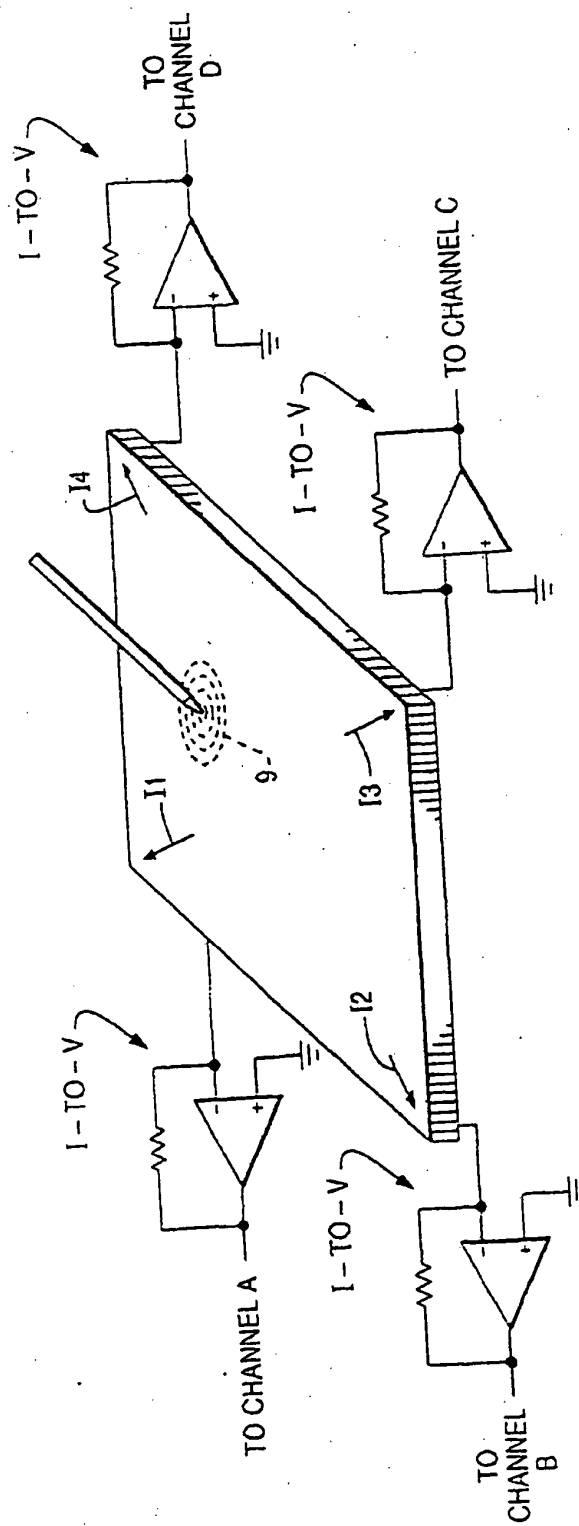


FIG. 4

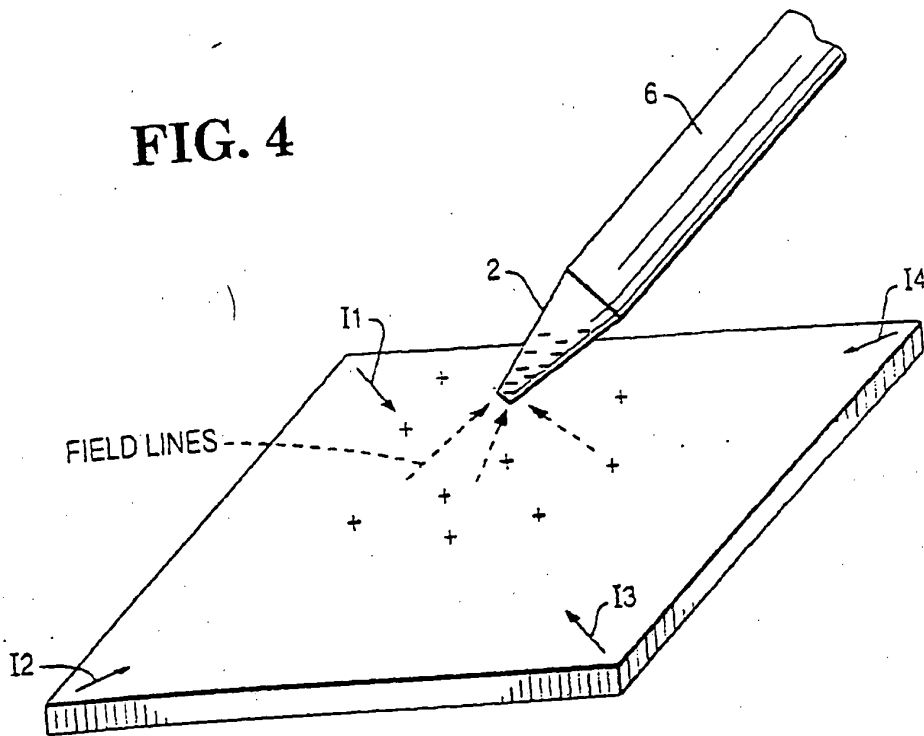


FIG. 5

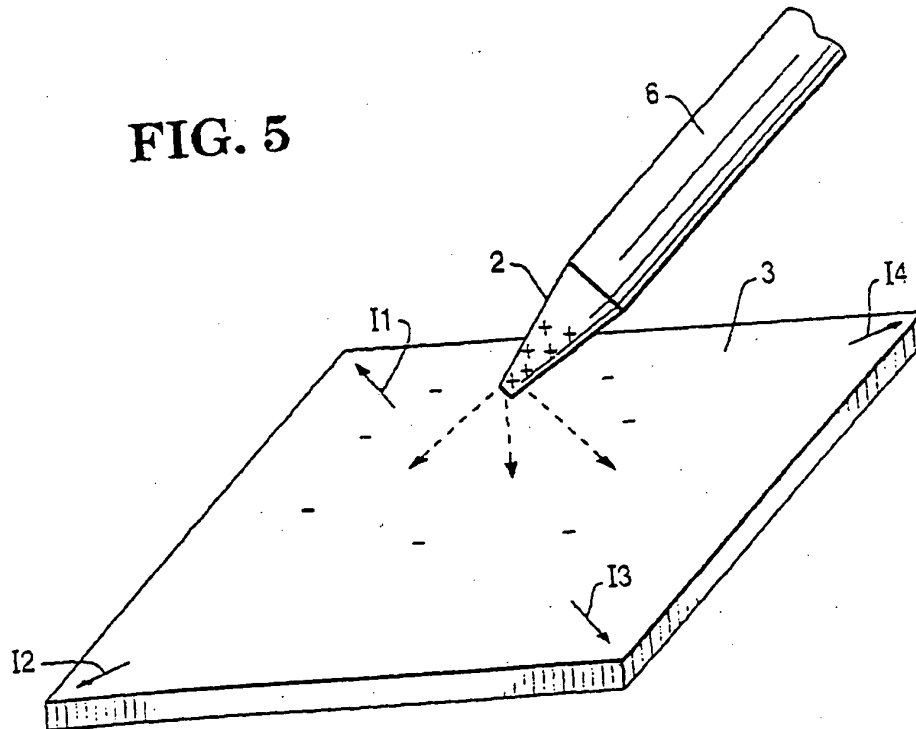
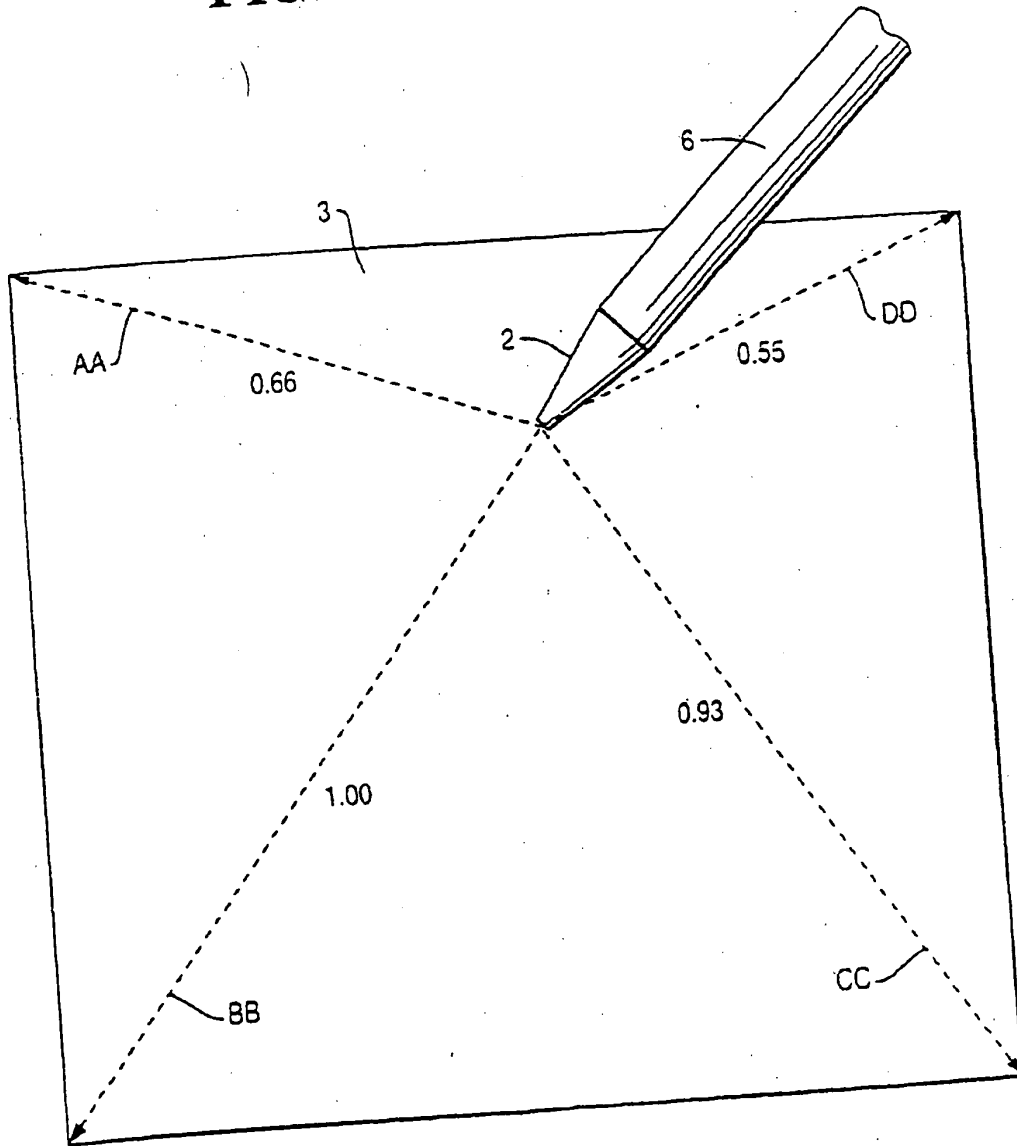


FIG. 6



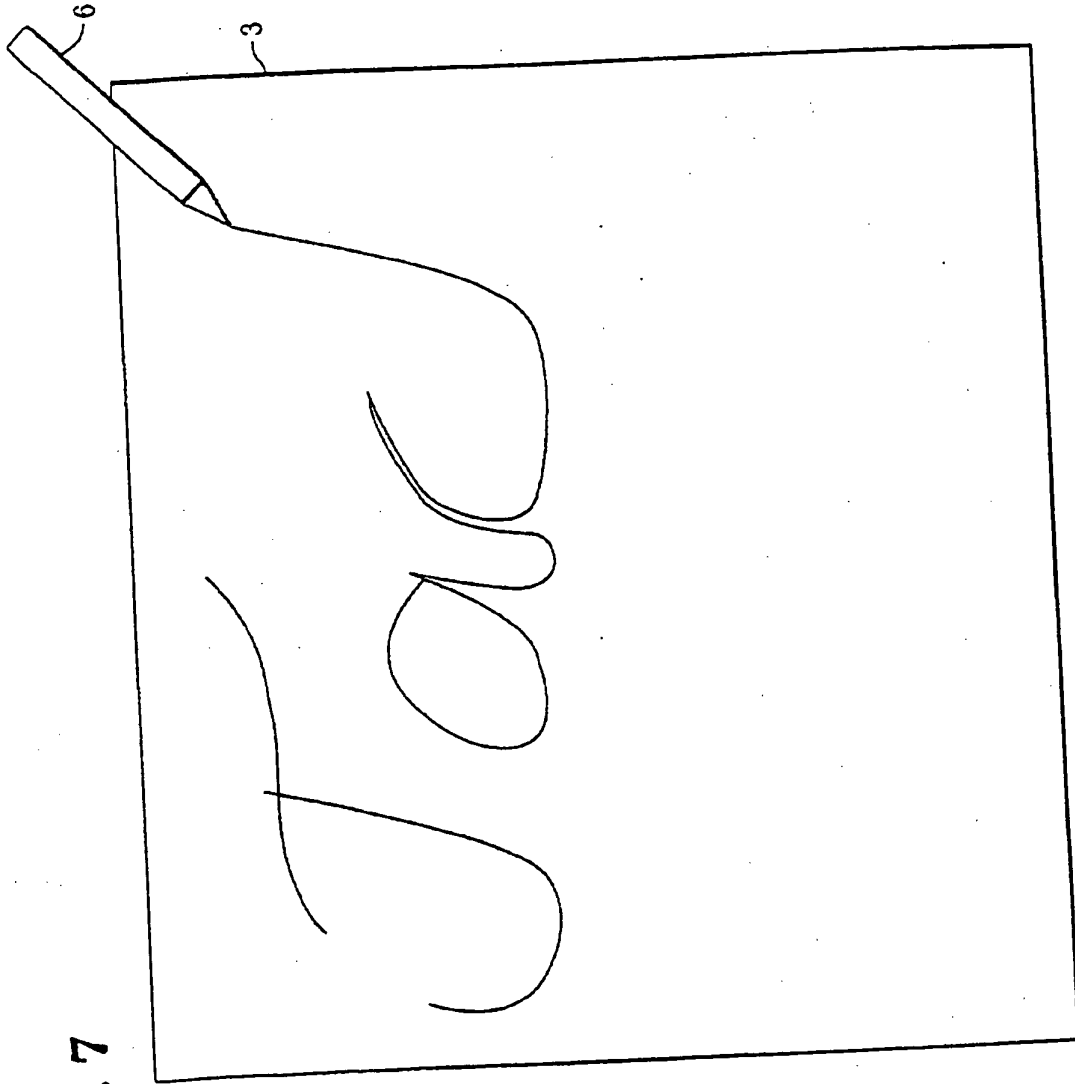


FIG. 7

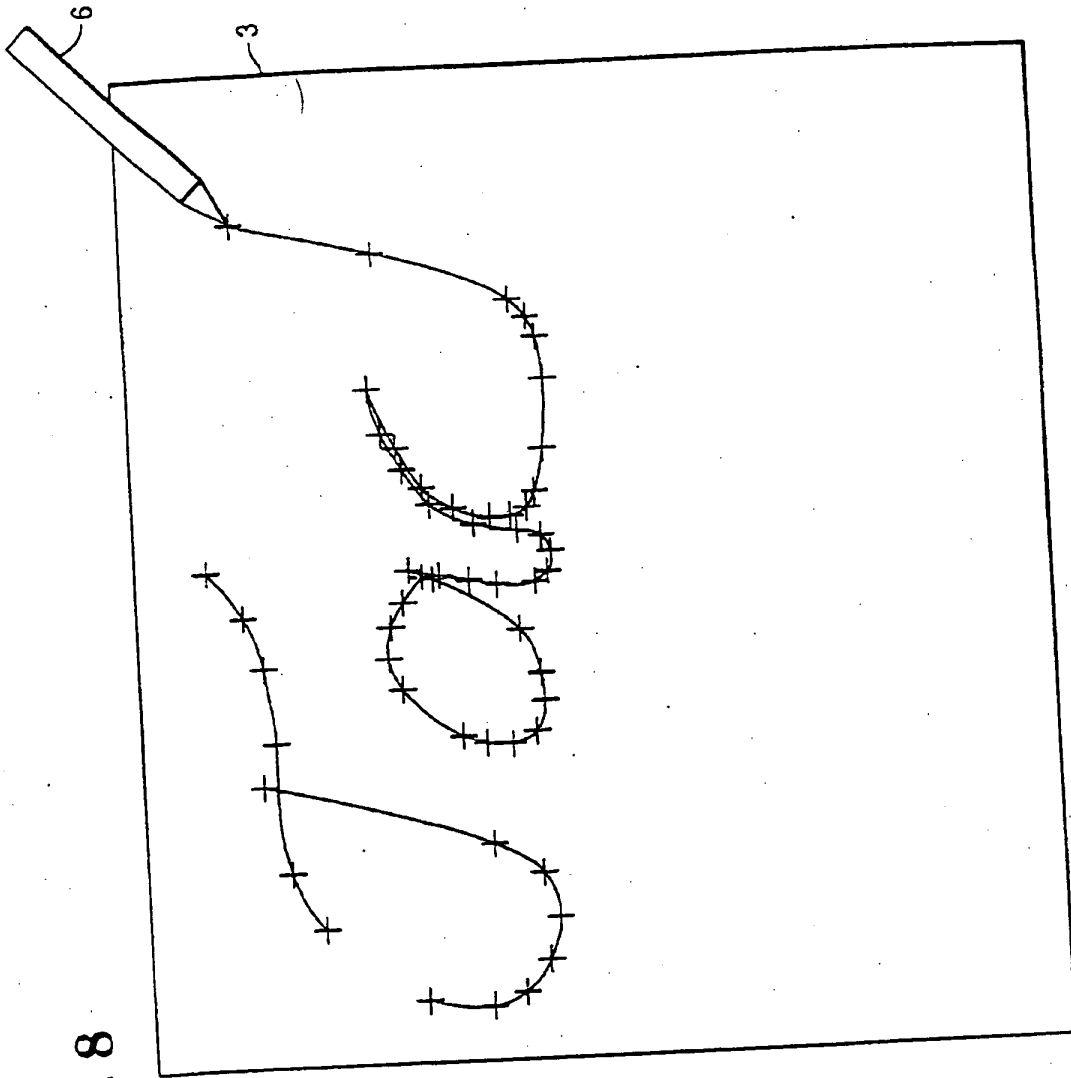


FIG. 8

FIG. 9

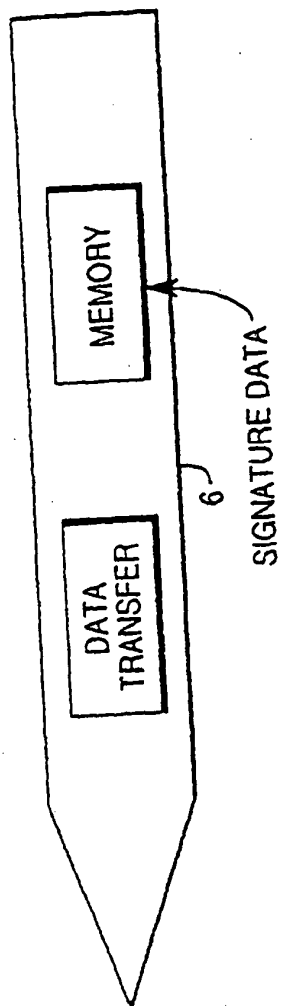


FIG. 11

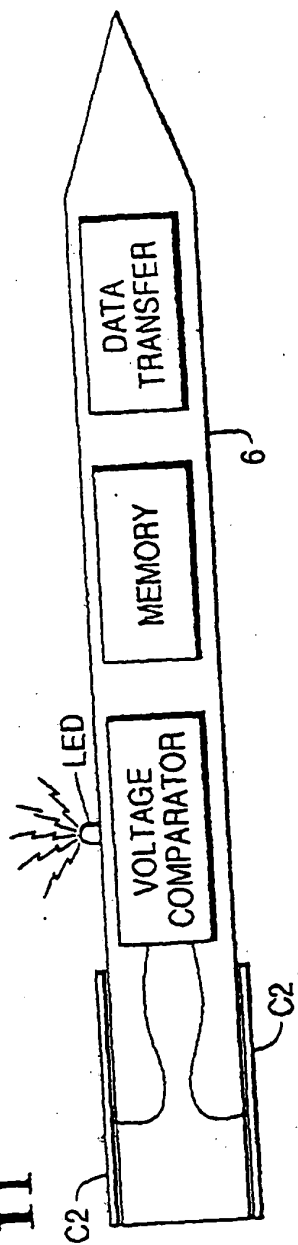


FIG. 10

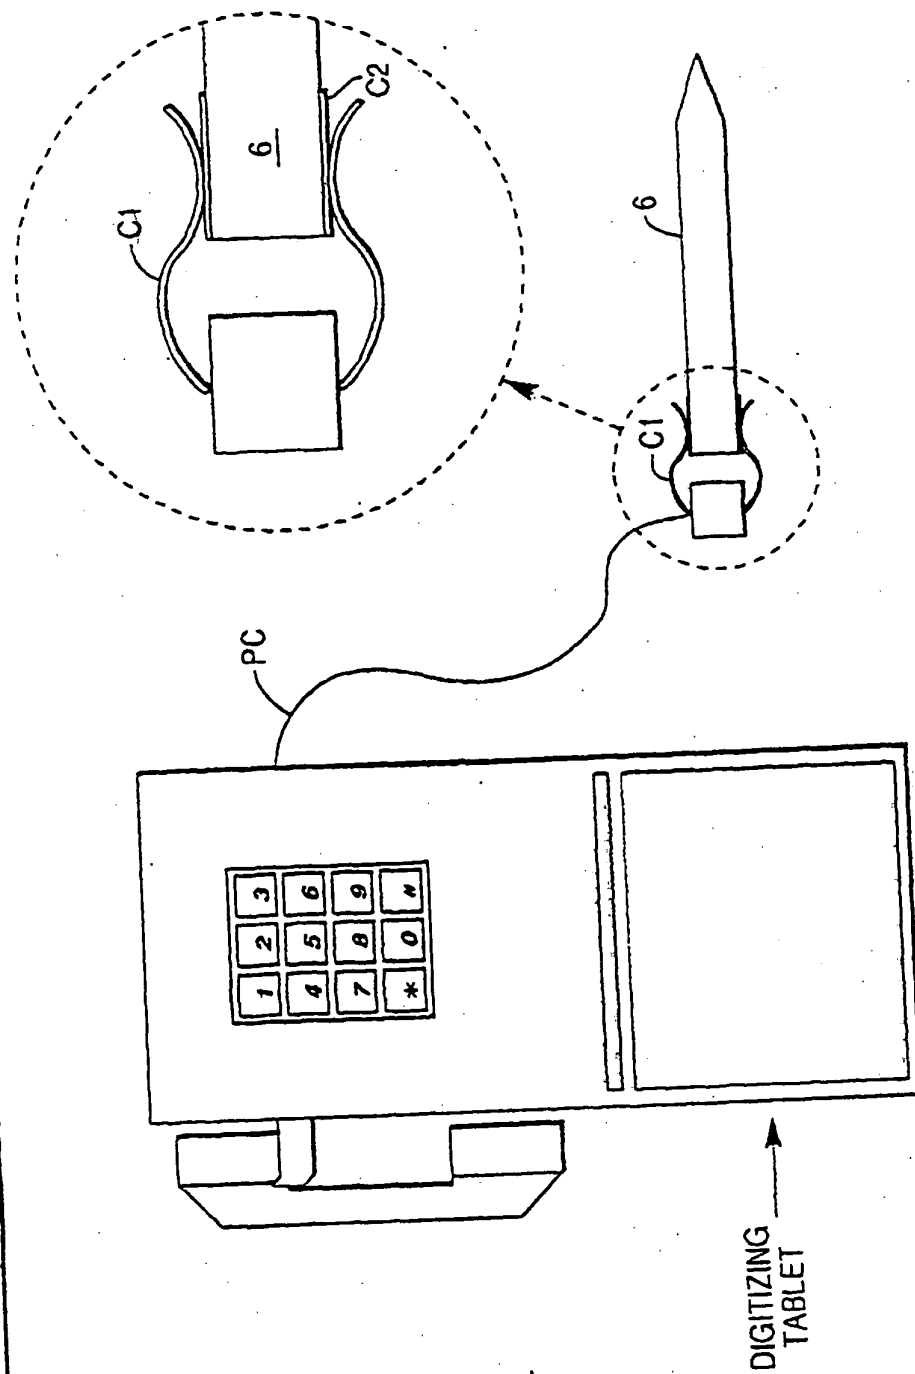


FIG. 12


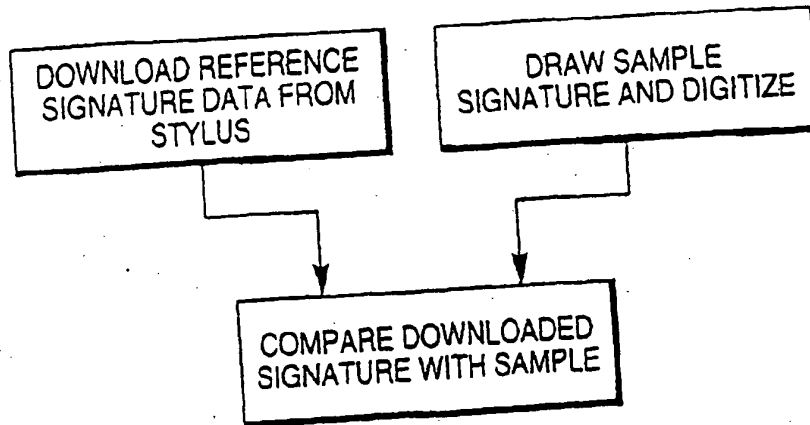


FIG. 13



(19)

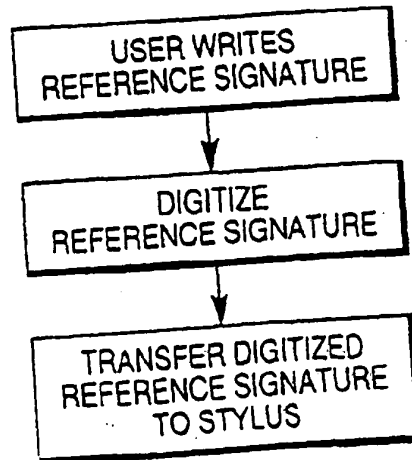

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 130 536 A3

EUROPEAN PATENT APPLICATION

(12)

(88) Date of publication A3:
17.10.2001 Bulletin 2001/42

(43) Date of publication A2:
05.09.2001 Bulletin 2001/36

(21) Application number: 01200370.3

(22) Date of filing: 13.12.1995

(84) Designated Contracting States:
DE FR GB

(30) Priority: 16.12.1994 US 357810

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
95309089.1 / 0 717 367

(71) Applicant: HYUNDAI ELECTRONICS AMERICA
Milpitas, California 95035 (US)

(51) Int.Cl.7: G06K 11/18, G06K 9/22

(72) Inventor: Skoog, Steven K.
Colorado Springs, CO 80917 (US)


(74) Representative: Gill, David Alan
W.P. Thompson & Co.,
Celcon House,
289-293 High Holborn
London WC1V 7HU (GB)

(54) Digitizer stylus apparatus and method

(57) The present invention provides for a stylus (6) for use with a digitizing tablet (3). The stylus is arranged to store information which identifies characteristics of a

user's handwriting and these characteristics are transmitted to a computer (2) when the user interfaces with the computer (2), and can then be used by the computer to recognize the user's handwriting.

FIG. 11

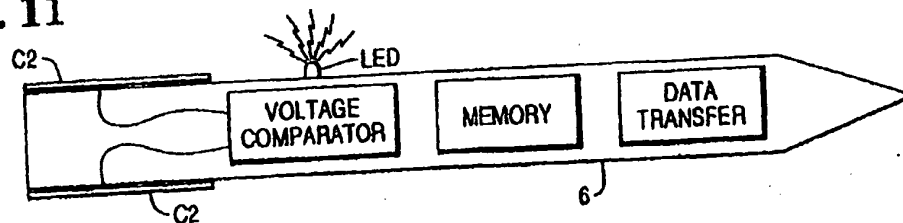

EP 1 130 536 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 20 0370

| DOCUMENTS CONSIDERED TO BE RELEVANT | | | Relevant to claim | CLASSIFICATION OF THE APPLICATION (Int.Cl.7) |
|--|--|---|--|---|
| Category | Citation of document with indication, where appropriate, of relevant passages | | | |
| A | WO 87 06744 A (ROTHFJELL ERIC) 5 November 1987 (1987-11-05) * page 10, line 35 - page 11, line 30 * | 1-27 | G06K11/18 G06K9/22 | |
| A | WO 94 18663 A (WOLFE EDWARD A ; BARON EHUD (IL); PRISHVIN ALEXANDER (IL)) 18 August 1994 (1994-08-18) * page 12, line 9 - page 15, line 27 * * page 17, line 2 - line 11 * | 1-27 | | |
| A | US 5 349 139 A (VERRIER GUY F ET AL) 20 September 1994 (1994-09-20) * figures 1-4, 7 * * column 9, line 18 - line 24 * | 1-27 | | |
| A | EP 0 362 970 A (NAT RES DEV) 11 April 1990 (1990-04-11) * column 5, line 27 - column 6, line 31 * | 1-27 | | |
| The present search report has been drawn up for all claims | | | TECHNICAL FIELDS SEARCHED (Int.Cl.7) | |
| | | | G06K | |
| Place of search THE HAGUE | | Date of completion of the search 24 August 2001 | Examiner Sonius, M | |
| CATEGORY OF CITED DOCUMENTS | | | T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document | |
| X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document | | | | |

EPO FORM 1503 03/82 (P/4001)

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 01 20 0370

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

24-08-2001

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|---|---------------------|----------------------------|---------------------|
| WO 8706744 A | 05-11-1987 | SE 450604 B | 06-07-1987 |
| | | AT 59107 T | 15-12-1990 |
| | | AU 585722 B | 22-06-1989 |
| | | AU 7394987 A | 24-11-1987 |
| | | DE 3766687 D | 24-01-1991 |
| | | DK 688887 A | 28-12-1987 |
| | | EP 0264423 A | 27-04-1988 |
| | | FI 875714 A | 23-12-1987 |
| | | JP 1502141 T | 27-07-1989 |
| | | NO 875433 A | 23-12-1987 |
| | | SU 1595354 A | 23-09-1990 |
| | | US 4856077 A | 08-08-1989 |
| WO 9418663 A | 18-08-1994 | IL 104575 A | 10-01-1997 |
| | | AU 6130994 A | 29-08-1994 |
| | | CA 2155189 A | 18-08-1994 |
| | | CN 1120868 A | 17-04-1996 |
| | | EP 0681725 A | 15-11-1995 |
| US 5349139 A | 20-09-1994 | JP 8508354 T | 03-09-1996 |
| | | | |
| EP 0362970 A | 11-04-1990 | JP 2571665 B | 16-01-1997 |
| | | JP 6202788 A | 22-07-1994 |
| | | CA 1274626 A | 25-09-1990 |
| | | DE 3678436 D | 02-05-1991 |
| | | EP 0248031 A | 09-12-1987 |
| | | WO 8702804 A | 07-05-1987 |
| | | GB 2183071 A, B | 28-05-1987 |
| | | GB 2208733 A, B | 12-04-1989 |
| | | GB 2208734 A, B | 12-04-1989 |
| | | GB 2228122 A, B | 15-08-1990 |
| | | JP 63501322 T | 19-05-1988 |
| | | US 5107541 A | 21-04-1992 |
| | | US 5226091 A | 06-07-1993 |

EPO FORM P/450

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82